

# Rydal II

07556 RYD230-W40

## Rydal II, 30W backlit LED panel 600\*600 4000K

- Save up to 50% energy usage compared to traditional fluorescent fittings
- DALI, 1-10V (0-10V) and PUSH alternative driver available
- TP(a) rated diffuser
- Flicker free
- UGR < 19
- Direct backlit lighting with wide-angle optics
- Optional anti-glare diffusers available



### Overview

The Rydal II is Kosnics standard 600 by 600 panel, with a energy savings compared to fluorescent fittings and a low glare flicker free output it makes and excellent direct LED replacement for retrofits.



IP20



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal

### Technical Summary

Product Code	RYD230-W40
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	30 W
Driver Code/Part number	DR29C75
Driver Maximum Power (W)	29 W
Driver Output Current (mA)	750
Power Factor	0.95
Driver Power Factor	>= 0.90
Default CCT	4,000 K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	3,200 lm
Emergency Luminous Flux	500 lm
L80B10 Lifetime (h) @Ta 25 °C	60,000 h
Nominal Lifetime (h)	50,000 h
Weight	1.45Kg
Dimensions (L x W x D) (mm)	595x595x34



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

07556 RYD230-W40

## Overview

The Rydal II is Kosnics standard 600 by 600 panel, with a energy savings compared to fluorescent fittings and a low glare flicker free output it makes and excellent direct LED replacement for retrofits.

## Optional Gear

Product Code	Description	Type
EMPAD02	Niah, 2W universal emergency pad for LED panel	Emergency Module
UEM03	3W Universal Emergency Module	Emergency Module
UEM03/ST	3W Universal Emergency Module, Self Test	Self-test Emergency Module
UEM04	4W Universal Emergency Module Pro	Emergency Module
UEM04/ST	4W Universal Emergency Module Pro Self Test	Self-test Emergency Module
CYC030TDC30-90	30W DALI2 1-10V primary push dim driver (KL30C-PDiV)	Dimmable Driver
DRC40/DA	Dimmable Driver: 40W DALI2 1-10V primary push dim driver	Dimmable Driver
UEM04/DA	4W DALI Universal Emergency Module Pro	Emergency Module
EMPAD02/ST	Niah self test 2W universal emergency pad for LED panel	Self-test Emergency Module


## Accessories

Product Code	Description	Type
ALDAG-0606	Alden 595x595mm anti-glare diffuser	Diffuser
SUS04	LED Panel & Slim Line II suspension kit (4 cables per bag)	Suspension Kit
SMT0606	Surface-mount frame for 600*600 panel, White	Mount Frame
SAS0606	Clips for Burgess ceilings	Clips/Brackets
REC0606	Recessed-mount frame 595x595mm white	Mount Frame
SUS04/25	Suspension kit 2.5m Alden & Nevis & Slim Line II (4 cables per bag)	Suspension Kit



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal

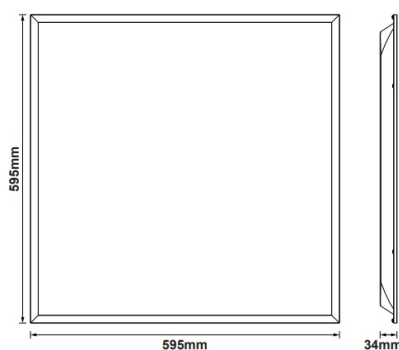

Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK


Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

# Rydal II

07556 RYD230-W40

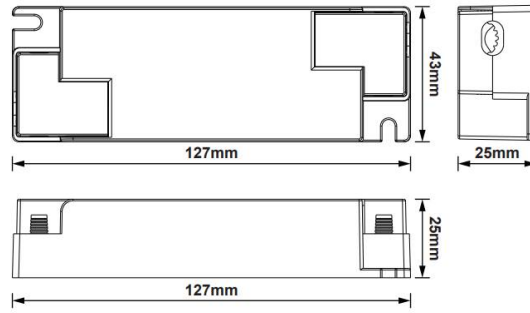

**DR29C75**

## Overview

The Rydal II is Kosnic's standard 600 by 600 panel, with a energy savings compared to fluorescent fittings and a low glare flicker free output it makes an excellent direct LED replacement for retrofits.



**IP20**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal



Kosnic Lighting



KosnicUK



KosnicLightingUK



KosnicUK

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)